



LAIKA

AN ISO 9001:2015
CERTIFIED COMPANY

Quality Products


PRECISION - PERFORMANCE - RELIABILITY

THRU BORE



Hydraulic Rotary Cylinders

ML-SERIES

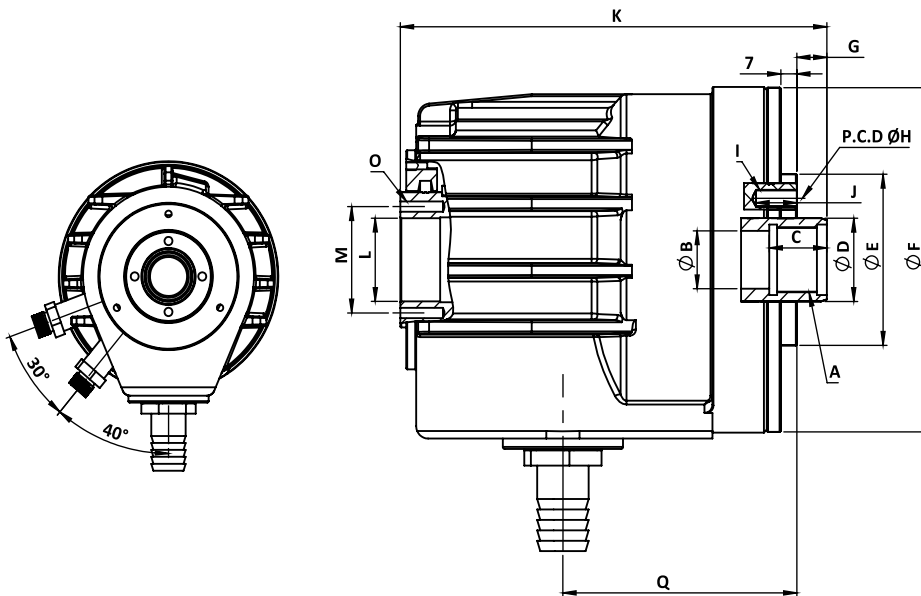

FEATURES

- * Aluminum Alloy Construction for light weight
- * Dynamically Balanced
- * This model does not have in-built safety valve.
- * Provided with / without Coolant Collector

DIMENSIONS

*All dimensions are in mm

MODEL	A	ØB	C	ØD	ØE h6	ØF	G (Max)	H PCD	I	J	ØK	ØL	ØM	O	Q
ML 80	1" BSP	28	28	40	82	165	15	68	6-M8x20	20	200	40	51	4x M5	118
ML 110	M52.2x1.5	47	30	65	100	185	19	81	6-M8x20	20	202	65	77	4x M5	124

SPECIFICATIONS

MODEL	Piston Dia	Stroke	RPM	Pull Area (cm ²)	Drawbar Pull (In kgf) at 30kgf/cm ²	Max Leakage @ 30Bar, 50° (lit/min)	Approx Wt (kgs)
ML 80	110	20	4200	82	2200	2	22.0
ML 110	132	25	4700	111	3000	3	29.0

Note: Specifications subject to change without prior notice